


Pipeline System Configuration

Quarter 4, 2010

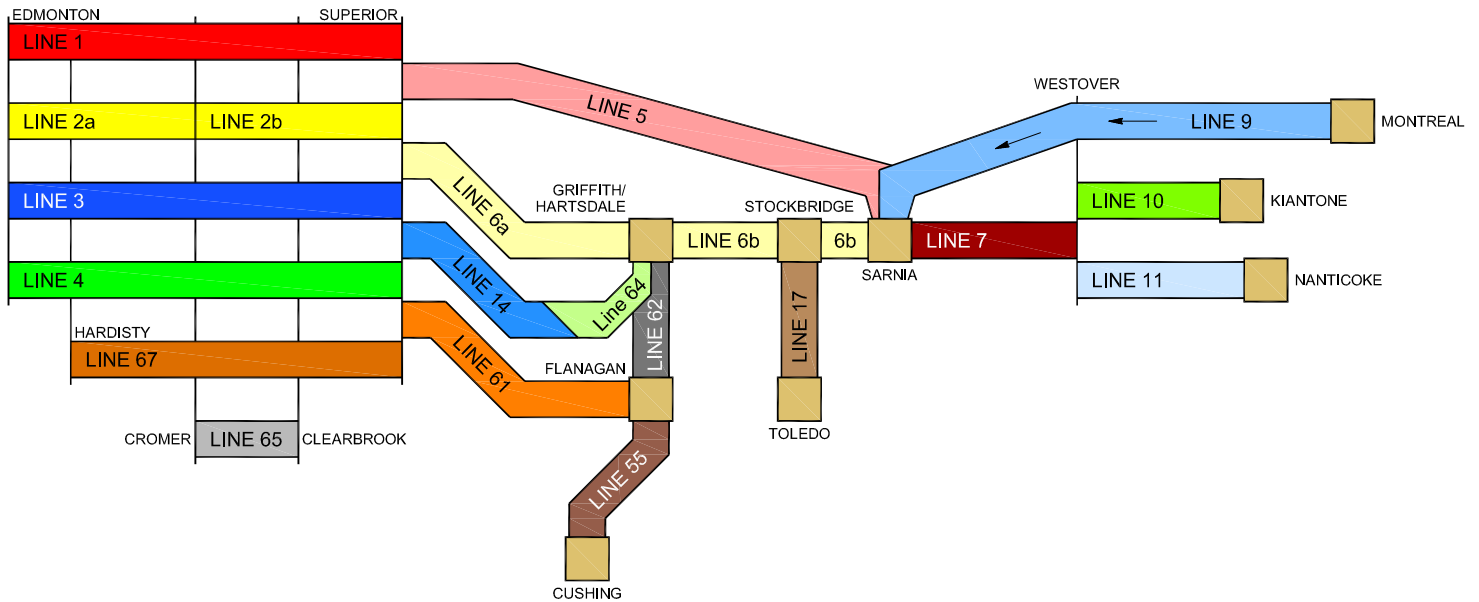

Line 1

240 kbpd
18"/20" - 1098 miles
NGL
Refined Products
Light Synthetics

Line 2

Line 2a
440 kbpd
24" - 596 miles
Line 2b
440 kbpd
24"/26" - 502 miles
Condensates
Light Synthetics
Sweet
Light & High Sour

Line 3

390 kbpd¹
34" - 1098 miles
Light Synthetics
Sweet
Light & High Sour

Line 4

800 kbpd
36"/48" - 1098 miles
Heavy
Medium (Ex-Clearbrook)
Light Sour (Ex-Clearbrook)

Line 5

490 kbpd
30" - 645 miles
NGL
Condensates
Light Synthetics
Sweet
Light Sour

Line 6

Line 6a
670 kbpd
34" - 467 miles
Line 6b
190 kbpd²
30" - 293 miles
Light Synthetics (Superior to Lockport)
Sweet (Superior to Lockport)
Light & High Sour
Medium
Heavy

Line 7

150 kbpd
20" - 153 miles
Condensates
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy

Line 9

240 kbpd
30" - 524 miles
Condensates
Sweet
Light & High Sour

Line 10

70 kbpd
12"/20" - 91 miles
Condensates
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy

Line 11

120 kbpd
16"/20" - 47 miles
Condensates
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy

L 14 L 64

320 kbpd
24" - 467 miles
Condensates
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy (Superior to Mokena)

Line 17

100 kbpd
16" - 88 miles
Heavy

Line 55

190 kbpd
22"/24" - 575 miles
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy

Line 61

400 kbpd
42" - 454 miles
Light Synthetics
Sweet
Light & High Sour
Medium
Heavy

Line 62

130 kbpd
22" - 75 miles
Heavy

Line 65

185 kbpd
20" - 313 miles
Light Sour
Medium

Line 67

450 kbpd
36" - 999 miles
Heavy

NOTES:

- Capacities provided are Annual Capacities
- ¹Current pressure restrictions limit the capacity to 390 kbpd. Annual capacity with pressure restrictions removed is 500 kbpd
- ²Tankage constraints reduce the usable capacity to 190 kbpd. Annual capacity without tankage constraints is 290 kbpd
- Updated: August 2010